


2D SCAN FX100



FIXED MOUNT 1D & 2D BARCODE READER

KEY FEATURES:

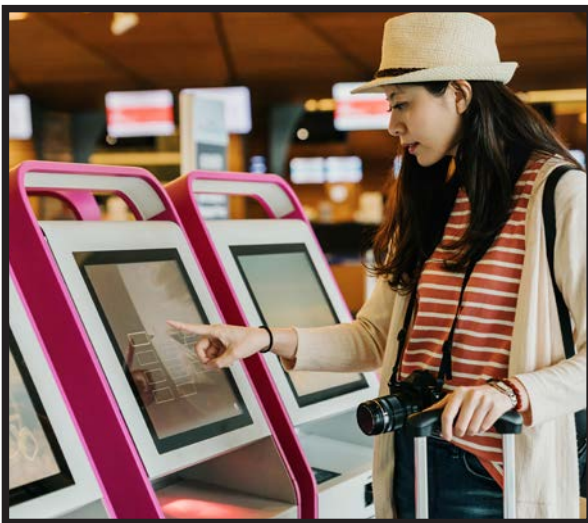

- 60 frames per second
- 1D Symbologies:
 - Codabar
 - Code 39
 - Code 93
 - Code 128
 - EAN-8
 - EAN-13
 - Interleaved 2 of 5
 - ISBN / ISSN
 - UPC-A
 - UPC-E
- 2D Symbologies:
 - Aztec
 - DataMatrix (ECC000, ECC200, 050, 080, 100,140)
 - Maxicode
 - PDF417
 - QR Code (Model 1/2)



2D SCAN FX100 SPECS

APPROVALS	CE EMC Class B & FCC Part 15 Class B
DIMENSION	60mm (L) x 50mm (W) x 26mm (H)
DROP TEST	1.5m
HUMIDITY	5% to 95% Relative Humidity
IMAGE SENSOR	CMOS
INDICATORS	Beep Tone, LED
INTERFACE	RS232 & USB Keyboard
LIGHT SOURCE	617.5mm - 633.5mm Visible Red LED
OPERATING TEMPERATURE	-5°C to 45°C
POWER REQUIREMENTS	5 VDC +/- 5%
SCAN RATE	60 Frames per Second
STORAGE TEMPERATURE	-40°C to 60°C
WEIGHT	2.47 oz



CORPORATE HEADQUARTERS

10721 WALKER STREET
CYPRESS, CA 90630
T: (714) 761-6368
TF: (800) 984-1010
F: (714) 761-8880
SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

