

INFLEX 215



FEATURES


- ▶ Hardened antiglare glass for easy cleaning optically bonded
- ▶ VESA 100 by 100 M4
- ▶ Lightweight plastic chassis construction
- ▶ 10 point PCAP touch
- ▶ PTD “USB-C Power To Device” feature
- ▶ Slot for Lenovo Chrome Box Micro
- ▶ Full USB-C in/out port
- ▶ 4 x USB-Micro slots for accessories

GENERAL SPECS

Resolution	FHD 1920 x 1080 pixels
Viewing angle	89/89/89/89 degrees
Brightness	400 cd/m2
Video input	USB-C/DP DP HDMI 1.4
Data input/output	USB-C/USB-A
OSD	Full button OSD
Shipping dimensions	TBD
Unit color	Black



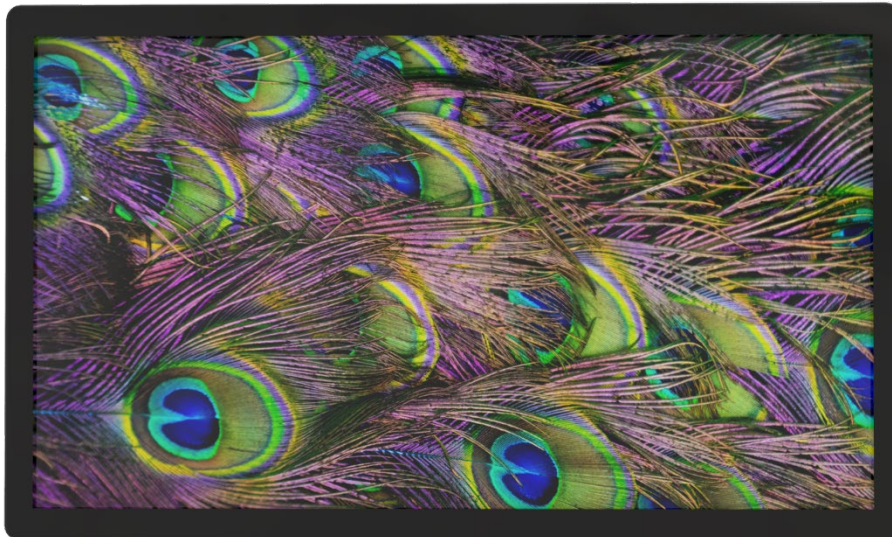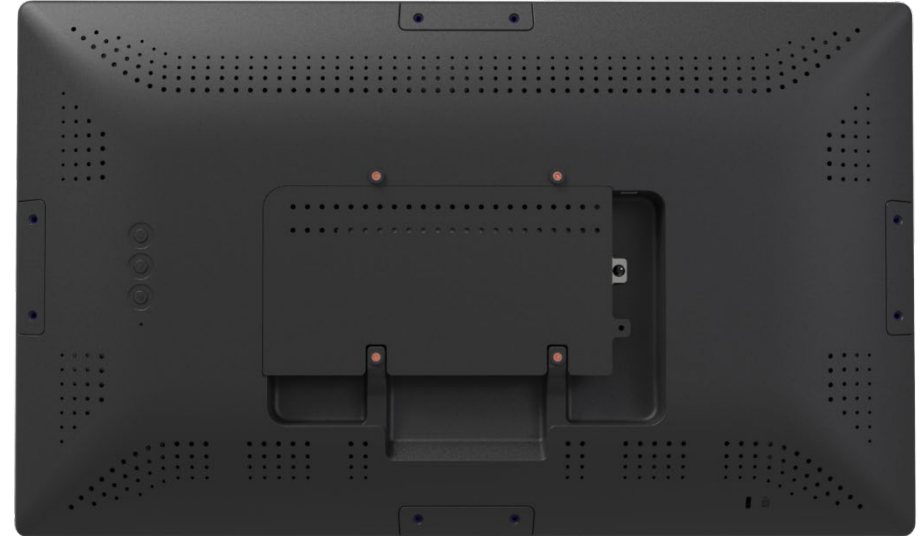

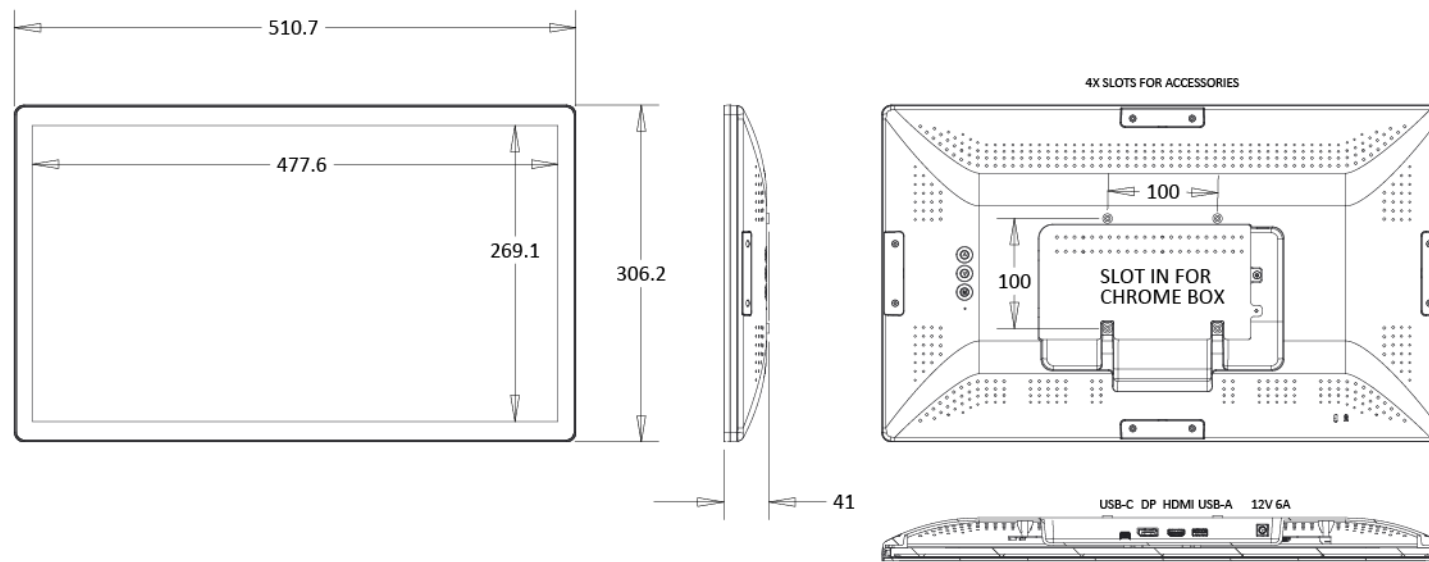

MONITOR SPECS

Display size	21.5 inch
View area	594. x 336.3
Touch technology	PCAP
Ppi	0.3114 x 0.3114 mm
Aspect ratio	16:9
Resolution	FHD 1920 x 1080 pixels
Response time	12 ms
View angle	89/89/89/89 degrees
Color support	16.7 M
Refresh rate	60 Hz
Brightness	400 cd/m2
Contrast ratio	3000:1
Protective glass	Hardened Anti Glare
LED lifetime	30 000 h

UNIT SPECS

Touch interface	10 Point PCAP 10 ms response
Power consumption	60 W (45 W passthru)
Power input	12 V 6A
Unit dimensions	501 x 306 x 41 mm
Unit weight	1.3 kg
Operating temp.	0°C to 50°C / 32°F to 122°F
Operating humidity	20% to 90%, relative
Mounting options	VESA 100 by 100
Shipping dimensions	TBD
Shipping weight	Approx. 1.5 kg
Storage temp.	-20°C to 60°C / -4°F to 140°F
Storage humidity	5% to 90%, relative

IN THE BOX

Unit	inFLEX215
Video cables	HDMI
Touch cables	USB-A
Power supply	Power brick Barrel 5.5 2.1

WARRANTY

Standard	1-year return to depot
Extended	Optional

CERTIFICATIONS

Unit	CE, FCC, ROHS
Power supply	CE, FCC, ROHS, UL

